

Oberlicht-/Seitenteilzarge als Zierfalzprofil
--

Zeich.Nr./Drawing No:	D0017593.dwg -1/4	Rev.: -	Maßstab/Scale:
ArtikelNr./Article No:		Rev.:	1:2.5


Toleranzen für Stahlzargen nach DIN 18111, weitere
Maßangaben nach Allgmeintoleranzen DIN ISO 2768-m.
Tolerances for steel frames according to DIN 18111, further
specifications according to general tolerances DIN ISO 2768-m.

Technische Änderungen vorbehalten
Subject to technical modifications

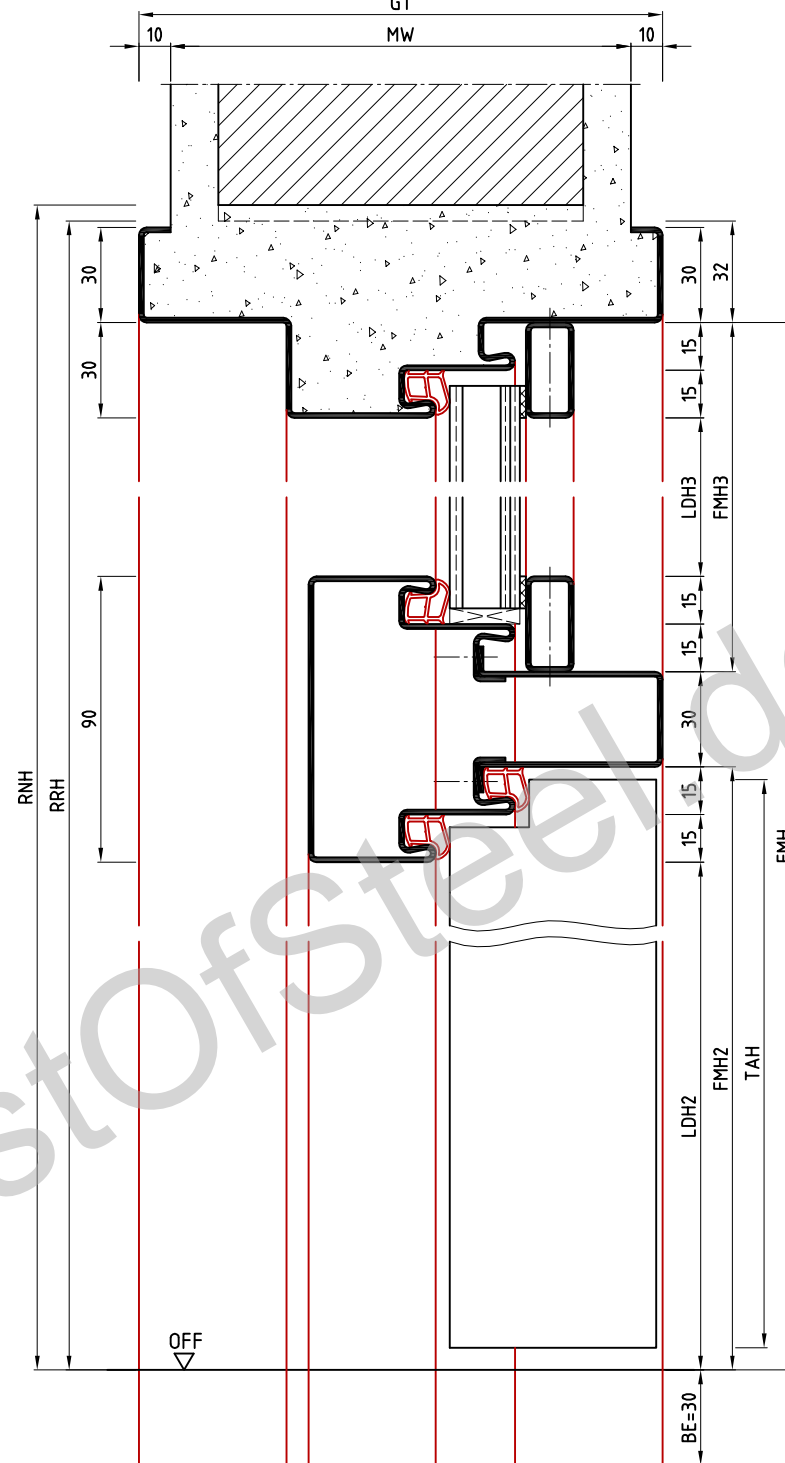
ACHTUNG:
Bei DIN-Türblatt RRM größer wählen.

Technical drawing of a reinforced concrete slab cross-section, showing dimensions and reinforcement details. The drawing includes a central section with a width of 46.5 (min. 15) and a height of 46.5 (min. 15). The total width of the slab is 46.5 (min. 15). The total height of the slab is 46.5 (min. 15). The drawing also shows the reinforcement layout, including top and bottom bars, and the placement of the reinforcement cage. The drawing is labeled with dimensions and reinforcement details, including the following:

- Top reinforcement: 30, 30, 30, 30
- Bottom reinforcement: 30, 15, 15, 30
- Reinforcement cage: 46.5 (min. 15)
- Reinforcement cage height: 46.5 (min. 15)
- Reinforcement cage width: 46.5 (min. 15)
- Reinforcement cage depth: 46.5 (min. 15)
- Reinforcement cage area: 46.5 (min. 15)
- Reinforcement cage volume: 46.5 (min. 15)
- Reinforcement cage weight: 46.5 (min. 15)
- Reinforcement cage cost: 46.5 (min. 15)
- Reinforcement cage efficiency: 46.5 (min. 15)
- Reinforcement cage safety: 46.5 (min. 15)
- Reinforcement cage durability: 46.5 (min. 15)
- Reinforcement cage fire resistance: 46.5 (min. 15)
- Reinforcement cage seismic resistance: 46.5 (min. 15)
- Reinforcement cage wind resistance: 46.5 (min. 15)
- Reinforcement cage snow resistance: 46.5 (min. 15)
- Reinforcement cage sound resistance: 46.5 (min. 15)
- Reinforcement cage vibration resistance: 46.5 (min. 15)
- Reinforcement cage thermal resistance: 46.5 (min. 15)
- Reinforcement cage moisture resistance: 46.5 (min. 15)
- Reinforcement cage air resistance: 46.5 (min. 15)
- Reinforcement cage light resistance: 46.5 (min. 15)
- Reinforcement cage sound resistance: 46.5 (min. 15)
- Reinforcement cage vibration resistance: 46.5 (min. 15)
- Reinforcement cage thermal resistance: 46.5 (min. 15)
- Reinforcement cage moisture resistance: 46.5 (min. 15)
- Reinforcement cage air resistance: 46.5 (min. 15)
- Reinforcement cage light resistance: 46.5 (min. 15)

[illegible]

Schnitt C-C

[illegible]

AsFd/KEsFd

	Name	Datum/Date
Bearbeiter	S.Lö	05.03.2020
Prüfer	T.We	10.03.2020

top-light/side part frame with blind rebate, brickwork
--

Zeich.Nr./Drawing No: D0017593.dwg -4/4
ArtikelNr./Article No:

Maßstab/Scale:
1:2.5

BOS Best Of Steel GmbH
D-48271 Emsdetten
Best Of Steel www.BestOfSteel.de

Toleranzen für Stahlzargen nach DIN 18111, weitere
Maßangaben nach Allgmeintoleranzen DIN ISO 2768-m.
Tolerances for steel frames according to DIN 18111, further
specifications according to general tolerances DIN ISO 2768-m.

Technische Änderungen vorbehalten
Subject to technical modifications